




FIRE INSTALLATION FLASHING SYSTEM


MASONRY CHIMNEY FLASHING for fireplace inserts

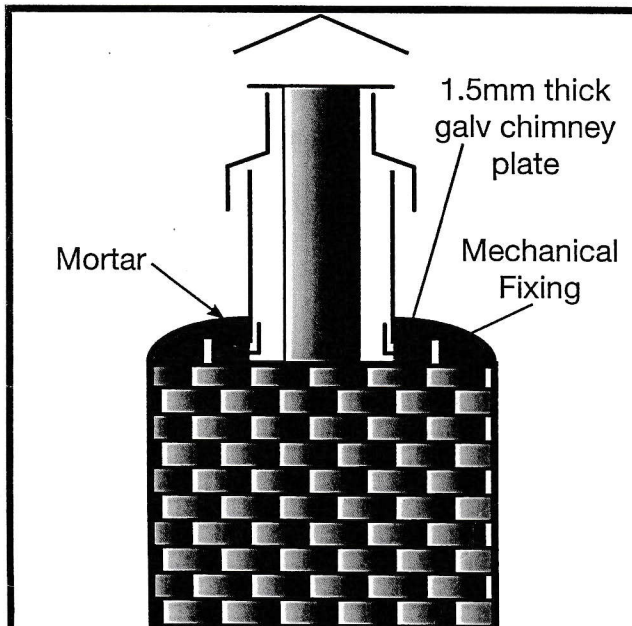


DEKTITE LEAD FLASHING for tiled roofs

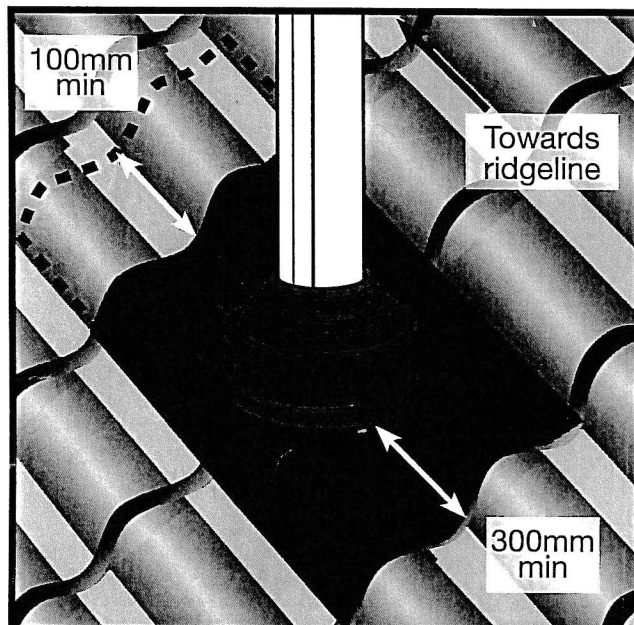

Use Dektite code TFL107 (900 x 600 base for 250 flue liner). Installed as per manufacturer's instructions



DEKTITE PIPE FLASHING for 250mm flue on a metal roof

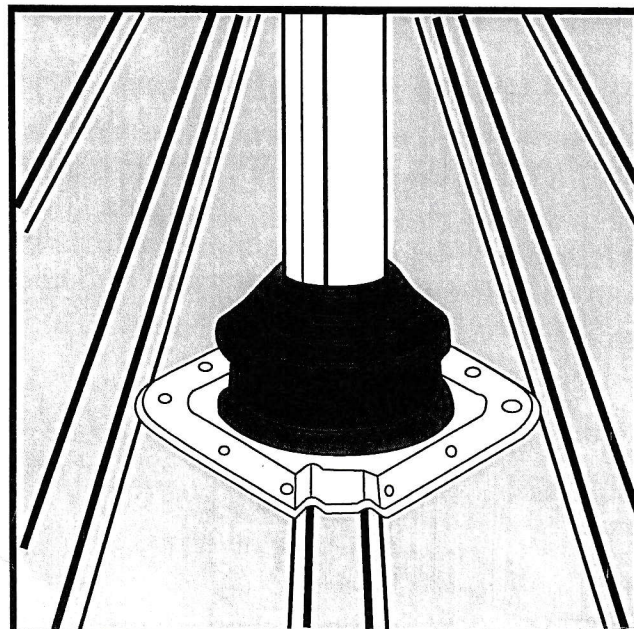

Use Dektite code DFE220-300 (453m² base for 250mm flue liner). Fastened with self-sealing fasteners or pop (sealed) rivets. Sealed with neutral cure silicone. Installed as per manufacturer's instructions

